


DIN 41612





2E Syscom Inc. - 86 Kendall Avenue - Framingham, MA 01720
Tel. 508 620 1678 - www.2esyscom.com - e mail 2e@2esyscom.com


IEC 60603-2

H15

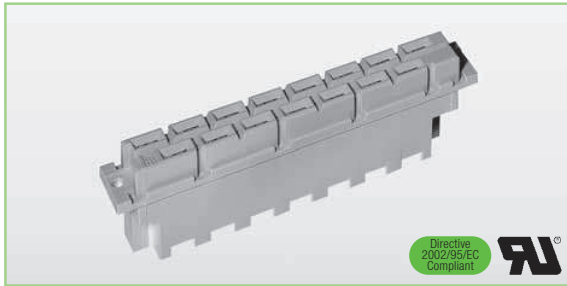

- Bauform H15 in Ergänzung an die DIN 41612
Type H15 in addition to DIN 41612
- Isolierkörper aus PBT
Material of insulating body: PBT
- Mit integrierter Kodierung
With integrated coding device

Polzahl/no of contacts		15		Zubehör/Accessories
	Gütek./mating class			
Handlöt solder eyelet 	1 (Ag)	05 H15fl-co Order-No. 052141		
Faston faston 	1 (Ag) (Sn)	05 H15ffa-co Order-No. 056111 05 H15ffaSn-co Order-No. 056114		
Schraubanschluss < 2,5 mm² nicht kodierbar, Isolierkörper: Polycarbonat screw cage < 2.5 mm² without coding, insulating body: Polycarbonat 	1 (Ag)	05 H15fsr Order-No. 052151		
Kodierkeile (grün) coding key (green) 				05 H-cod Order-No. 0560115600C99

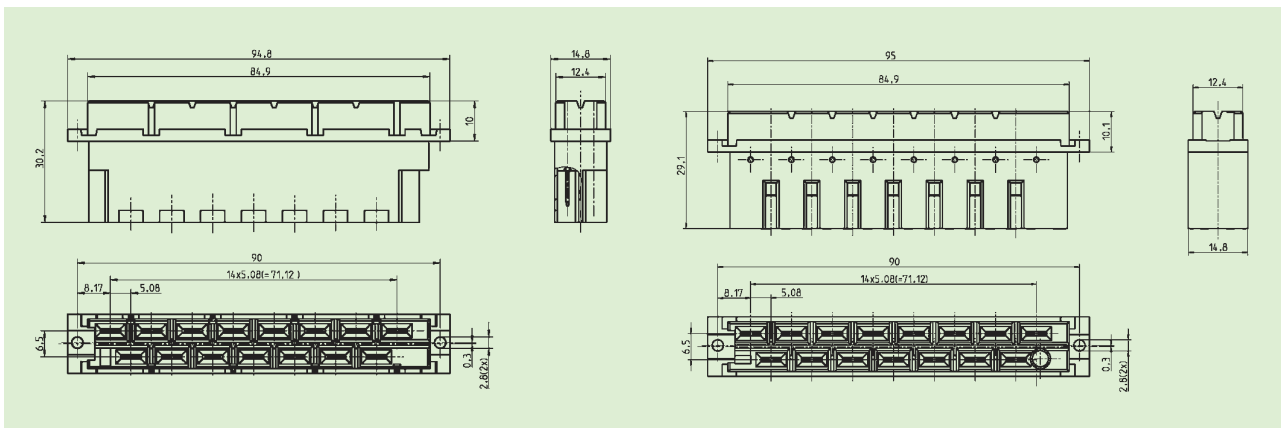

Technische Daten Seite 16 und 17.
Technical specifications page 16 and 17.

